

Introducing the **NEW** Ventrac 4500
Over 40 attachments to choose from!

VENTRAC
Your **ONE** Tractor Solution

CALL FOR A DEMO

NEW Engine Options
Kubota
Kawasaki

Made in USA




See Ventrac tractors in action

LE 3100/3200 ... Over 20 attachments available

Good things come in small packages



STANDARD FEATURES:

- All wheel drive
- Hydrostatic drive
- Articulating/oscillating frame
- S.D.L.A. controls
- Foot pedal

OPTIONAL FEATURES:

- Knobby tires
- Weight transfer (standard on 3200)
- Tilt steering (standard on 3200)
- 12 volt power supply/switch control
- Suspension seat
- Roll bar
- Tractor cab

These power-packed units feature all-wheel-drive, power steering, hydrostatic drive, and more. The Ventrac Mount System allows you to change attachments quickly and efficiently, moving from job to job with minimal effort.

Equipped with a patented Tandem Drive train, the 3100 & 3200 efficiently transfers power to where it's needed for unparalleled performance and power.

Also standard on the 3100 & 3200 is Ventrac's patented S.D.L.A. control, which allows for easy command of speed, direction, lift and auxiliary function all with one hand.

Combine these features with a tight 28" turning radius and you will find the 3100 & 3200 can tackle jobs reserved for much larger, less maneuverable machines.



Shown with optional cab

3100: 21HP V-twin air cooled engine, gas **OR 3200:** 23.6HP Liquid cooled engine, diesel





The Ultimate Tree Mower

A unique mower designed to maintain grass and small brush growth on tree farms, nurseries and blueberry farms



Made in USA



VENTRAC 3100/3200 with Tree Mower - LQ450

- All wheel drive
- Tree deck 45"
- Hydro lift
- 3 cutting heights - 2 1/4", 3 1/2", 4 3/4"
- Branch lifters & tire covers - standard
- Rear engine design, less heat/noise/exhaust
- Counter rotating blade, rear discharge - leaves clippings in middle
- 26" turning radius
- Suspended front chains, cuts tall grass more effectively, reduces potential of front discharge
- Single swivel front tire
- Optional weed sprayer listed below

GAS OR DIESEL ENGINE OPTIONS



VENTRAC TRACTORS

VENTRAC 3100/3200 Spraying Unit SPRAY ATTACHMENT SPECIFICATIONS

Tank: 15 gallon polyethylene
Pump: 1.4 GPM, 12 volt diaphragm pump
Pressure: Manual adjustable bypass
Spray Nozzles: Single swivel nozzle bodies mounted one each side of tractor. Adjustable in width and height
Controls: Independent nozzle controls right or left
Valves: Manual valves
Steel Framework: Easily attaches to tractor hitch
Tips: Standard, off-center flat fan, other tips available as options.
Hand wand with 6' hose included for spot spray treatment.

SET Ventrac-12V

All components available separately



Sprayer nozzles are adjustable in width and height



Single swivel adjustable nozzle body with OC tips

VENTRAC with LC150 Stump Grinder

The LC150 stump grinder features 12 replaceable carbide cutting teeth. Adjustable blade hydraulically lowers to double as a jack stand and depth gauge.
AVAILABLE FOR MODELS 3000, 3100 AND 3200

LC150 STUMP GRINDER SPECIFICATIONS

Rotor tip speed: 2,475 ft./min*
Rotor RPM: 620 RPM*
Cutting depth below ground level: 6"

* Engine speed of 3200 RPM



Ideal for grinding stumps in the tight quarters of a choose and cut operation





Made in USA

HYDROSTATICALLY SELF-PROPELLED

Discover The Cutting Edge

Manufactured & Assembled in the USA

Great for clearing under brush & saplings,
mowing around trees & under fences and
clearing paths & trails

pictured: Model 1305



Model 1305 Multi-Use Tractor For Use With Quick Change Attachments



TUR 1305PL Plow

The 46 inch wide plow is ideal for snow removal and grading/leveling soil and gravel. The Plow angle (left/right) can be easily adjusted from the operator position and its unique design has the capability to allow the blade to oscillate or to be locked into position. The Model 1305PL utilizes

an innovative compression spring trip release. Additional features include a replaceable cutting edge, a fully hydrostatic transmission with forward /reverse and a 13 HP Honda engine. The Plow can also be easily converted into a Power Edger, Power Broom, Power Rake or Brush Cutter for all season use. Plow also sold separately.

The Grillo Climber Mower 9.22



The Climber will go where no other ride-on mower will.

A 36" rear discharge tuff cut mower with 22 HP Vanguard air cooled engine, front brakes, differential lock, roll bar, hydrostatic transmission, and swing away blades. Extend your mowing into sloping terrain, rough ground and tall grass.



Design

The Climber's unique design, with its low center of gravity, central weight distribution, and differential locking capability will help you mow places you can't even take a tractor. Go places you have never gone before and extend your mowing where previously impossible. The Climber is designed to mow safely up and down slopes up to 33° and up to 17° across slopes, even on difficult and slippery terrain.



Reliability

The difference with Grillo is that as a family owned business, established on quality, keeping this value in their products is very important. Grillo is Italian and built to last. Their high quality components, top class manufacturing and highly innovative design makes their mower stand out above the rest. Professional equipment that provides great performance.



Performance

The Climber is designed for the rough stuff. It will take care of 3' tall grass, weeds and brush. It's capable of flattening an overgrown section, or those properties you can't mow every week, making it a perfect choice for the Christmas tree grower. Non-mulching rear discharge is the secret to this aggressive and effective cutting system. The Climber loses no power as it charges through grass, leaving an even spread of cut grass in it's wake.

FERRI ZMT



Offset in-line slope mowers For Agriculture and Roadside Tractors from 60 - 80 HP

ZMT180 — 60-70HP, 5'11" cut width
ZT2300 — 70-80HP, 7'5" cut width



FERRI MT

Mowers For mowing grass and twigs

MT140 — 30-45HP, 4'7" cut width
MT160 — 35-50HP, 5'3" cut width
MT180 — 45-60HP, 5'11" cut width
MT200 — 50-70HP, 6'7" cut width



FERRI ME

Mowers For mowing grass

ME125 — 20-25HP, 4'1" cut width
ME155 — 25-30HP, 5'1" cut width

Ferri offset flails work well for long reach or ditch bank mowing. Flails lift to 90° vertical or down to -50°. Safe and perfectly balanced, these machines allow for careful working even in difficult situations. ME and MT mowers for grass and light brush include adjustable rear roller, internal sealed rotor bearings, double skin and cast iron gear box.

FERRI ZME

Offset in-line slope mowers Specifically designed for compact tractors

ZME125 — 18-30HP, 4'1" cut width
ZME155 — 25-40HP, 5'1" cut width



Flail Choppers

3 pt. hitch PTO chopper is very heavily constructed complete with: rear roller, belt drive through H.D. gearbox, H.D. 5 lb. flails, adjustable cut height 3/4" - 4 3/4", parallelogram hitch. Brush rake and swinging rotary mower arm optional.

Model	BG2-180	KG-220
Cut Width	5'11"	7'3"
Offset from Center	4'10"	6'2"
Min. HP-Grass/Brush	35/45	40/60
Weight-Lbs.	1280	1480

Other widths available. Call for more information.

Parts and service available for all Perfect mowers and shredders. Call or write for specific information on Perfect equipment.

REARS

Made in USA


OMF
Flail Mower**OMF-750 SERIES**

- Super-duty low profile Flail Chopper
- 2 3/4 lb. hard faced hammers mounted on 3/4" Grade 9 bolts with 1 1/2" mount pads
- 2.4375" spherical roller main bearings
- Double wall housing 3/8" liner under 3/16" skin
- 24" hydraulic offset standard
- Floating top link pad
- Cutting width from 4'-9'
- Heavy duty - 6'-2,154 lbs., 7'-2,350 lbs., 8'-2,550 lbs.
- Options: Push/pull mount




OMF Flail Hanger

The Series 750 OMF flail uses a double row spherical roller bearing with oversized rollers and an eccentric locking collar. This rotor bearing is nested in a labyrinth grease seal.

**REARS FRONT MOUNT**

Run the slopes with Rear's Front Mounted Pak-Flail. Pak-Flail mows grass, eats brush and small trees. Leaves a covering of mulch, an ideal light bedding easily covered by the first snow.

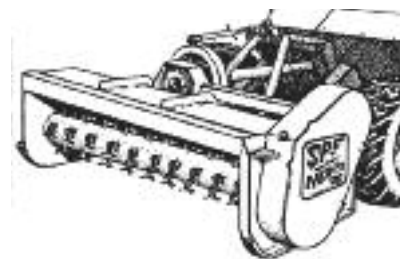

Call about the availability of rebuilt equipment as an economical option to new!




SPF Flail Mower

Visit our website for **REARS**
flail mower spec sheets
www.oescoinc.com




SPF FLAIL MOWER

- For the lowest horsepower available in tractor restrictive plantings. Ideal for cane, berries, Christmas trees, ski resorts, parks, golf courses, nurseries.
- 3-point mount, centered or offset. 24 to 100 inch cutting widths.
- Options: Low-profile unit. Hydraulic offset. Front mount unit. Push/pull mount. Right hand drive. Narrow vineyard profile
- 0 to 6 inch cutting height.
- Grass-blades and shredding knives.

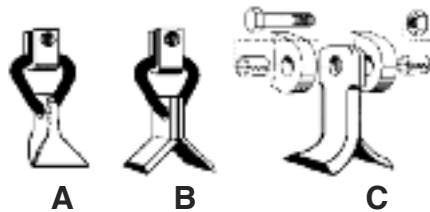


A - FL920 Super-TUF hardened grass blade assembly for a finish cut

B - FL960 shredding knife assembly for a coarse cut in grass and for shredding light brush



The FL920 and FL960 blade assemblies are easily replaceable without a wrench or socket. Simply turn the D-ring hanger and slip off the blade.

C - FL940 crop chop knife for heavy mowing and brush shredding

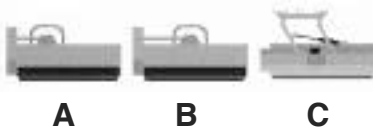

- A** - left hand drive, fixed right offset
B - left hand drive, fixed center mount
C - left hand drive, hydraulic pantograph



REARS SPF/IFA FLAIL MOWERS



IFA Flail Mower



NEW

The IFA is a heavier duty bumped housing flail. This machine features a beefed up gearbox, rotor and roller bearings, belt tensioning and a thicker housing panel. Use this machine in place of the SPF model where conditions are more rugged and work duty is higher.

**OESCO is one of the top
REARS dealers in the world!**

**Call, email or write for specific
information on any flail mower.**





Model	Main Deck Spindles	Min. Tractor HP	Min. Width	Max. Width	Weight (lbs.)
SL3-180-230	3	30	72"	92"	814 *
SL3-200-250	3	40	80"	100"	858
SL3-230-280	3	40	91"	110"	924 *
SL4-270-320	4	50	108"	128"	1100
SL4-310-380	4	60	122"	142"	1188 *

Fischer's SL series orchard mowers are rugged, compact and low profile. They are ideal for low-hanging fruit. The swing arm is available in either mechanical or hydraulic sensing retract. The hydraulic sensing style uses the tractor hydraulics to set the width, then the self contained sensing system moves the arm around even the smallest trees with no damage. All SL models include 30" hydraulic linear side shift.

* Stocked Models

SERIES RF ROTARY MOWERS

3 pt hitch with swing arm. Low construction to clear fruit branches, parallelogram for offset adjustment, front swivel wheels to adjust to terrain, large rear roller, swing arm to cut around tree trunks. Hydraulic offset, swing blades, feeler bar, all optional.

Specifications: Right offset only

Model	RF-220	RF-300
Cut Width	7'3"	9'10"
Offset from Ctr.	7'1"	8'4"
Min. HP	22	30
Weight-Lbs.	905	1135



RF-220 3pt w/ Cutting Width 7'3"



SERIES ZA ROTARY MOWERS

Trailed rotary mower with swing arm. Trailed from the drawbar on the tractor, these machines are capable of large offset. Two large tires and one swivel support mower to give high quality cutting. Swing arm cuts easily around fruit tree trunks. Lengthways transport featured for large machines.

Specifications: Left offset only

Model	ZA-300	ZA-340	ZA-380
Cut Width	9'10"	11'2"	12'6"
Offset from Ctr.	9'1"	10'10"	11'10"
Min. HP	30	35	40
Weight-Lbs.	1115	1230	1345



ZA 300 Rotary w/ Cutting Width 9'10"

SITREX Finish Mowers



Sitrex three spindle finish mowers.

- Suitable for parks, golf courses, athletic fields, highway maintenance & farming.
- 12-40HP
- Fully floating 3 pt. hitch to obtain best cutting finish, even on undulating ground
- All rear discharge models are fitted with safety chains



Model	SM 120 P	SM 150 P	SM 180 P
Cut Width	48"	60"	72"
Cut Height	1"-4"	1"-4"	1"-4"
HP Required	12-20	15-30	20-40



GL



Model	Spindles	Min. Tractor HP	Min. Width	Max. Width	Weight (lbs.)
GL4/60-140-245	4	30	55"	96"	704
GL4/60-180-280	4	40	71"	110"	858 *
GL4/70-180-300	4	40	71"	118"	891 *
GL4/80-200-340	4	50	79"	134"	1056
GL4/90-220-380	4	60	87"	150"	1177 *

The Fischer GL4 features two precision-sensing hydraulically-controlled swing arms, a self-contained hydraulic system and height adjustable rollers, making it an ideal mower for vineyards, tree plantations, nurseries and high-density orchard plantings. The GL4's ability to mow carefully within the row is particularly helpful to growers whose management program does not include the use of herbicide strips. Available in a wide range of sizes.

Pictured with optional Herbicide Kit.

* Stocked Models


Scan for Fischer mower videos and spec sheets



FISCHER ORCHARD/VINEYARD MOWERS



BV

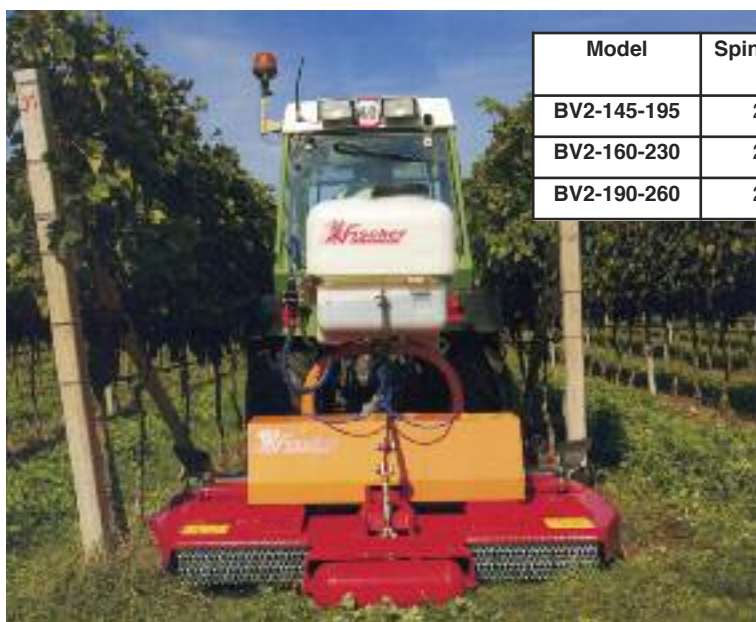

The BV2 is a versatile mower for fruit plantings of all types — tree fruit, grapes or berries. The BV2 features a continuously variable hydraulic width adjustment as well as hydraulic side-shift. It is an ideal machine for variable width plantings where the management plan incorporates herbicide strips.

Model	Spindles	Min.Tractor HP	Min. Width	Max.Width	Weight (lbs.)
BV2-145-195	2	40	57"	77"	863 *
BV2-160-230	2	40	63"	91"	1078
BV2-190-260	2	50	75"	102"	1232 *

Fischer BV2 Features:

- 3 pt. hitch mount
- Hydraulic width adjustment
- Hydraulic side shift
- Three over-sized cast gearboxes
- Heavy duty steel plate deck
- Two counter-rotating blade rotors with four swing-mounted mower blades
- Chain guards, front and rear

Pictured with optional Herbicide Kit.

* Stocked Models





The Ultimate Trail and Farm Machine

The Goldoni Transcar is a powerful, versatile and compact off road workhorse. With articulated steering and a 3500 lb. load capacity, the Transcar will make small work of your biggest jobs. From trails to construction sites to horse farms, the Goldoni Transcar does it all.



**RENTAL
AVAILABLE**



3-Way Dump: Right, Left and Back

Transcar W33SN "Syncro"

- Engine: Lombardini 2-cylinder diesel LDW1503 475kw, 33 HP, water cooled
- Transmission: Manual shift, synchronized with 8 speeds forward and 4 reverse
- Hydraulic service brake, double circuit acting on all four wheels
- Mechanical parking brake, acting on the rear wheels
- Power steering - articulated
- Rear standard 540 PTO
- ROPS approved rollover protection with seat belt
- Trilateral hydraulic dumping through a 4 stage sliding cylinder
- Tires: 10.0/75 x 15.3 ag tires, turf tires optional
- Body: 89"L x 59"W x 14"H

Transcar W40SN "Syncro"

Our #1 Seller!

- Lombardini LDW 1603 three cylinder diesel engine, 36.2 HP, water cooled
- Tires: 10.0/75 x 15.3 ag tires, also available with turf tires
- 16 speed synchronized transmission, 8 forward and 8 reverse with reverser
- 4 WD with rear wheel mechanical disengagement
- Differential lock—both axles—hydraulically operated
- Hydraulic brakes, double circuit, acting on all four wheels
- Hydrostatic steering—articulated
- Rear PTO—standard at 540 rpm, clockwise rotation
- Trilateral hydraulic dumping through a 5 stage sliding cylinder
- ROPS approved rollover protection with seat belt
- Body: 94"L x 59"W x 16"H





BUSH HOG®

"THE ORIGINAL" SQUEALER ROTARY CUTTERS
Our BEST Selling Rotary Mower!
For light mowing on small or large areas



SQUEALER

ALL PARTS AVAILABLE!!



Made in USA



SQ160

- 5 Year gearbox limited warranty
- Pan type blade carrier
- EZ clean deck
- Quick hitch compatible
- Sidebands with welded skids
- EZ lube drivelines
- Quick detach gearbox shields
- Bush Hog® gearboxes

- Powder coat paint
- Below deck structure
- Rear band
- Original Bush Hog design
- Genuine Bush Hog blades
- Laminated tail wheel
- 1" cutting capacity

Single Spindle Models	Squealer 142	Squealer 148	Squealer 160	Squealer 172	Squealer 184
Cut Width	42"	48"	60"	72"	84"
PTO HP required	10-25	15-20	25-40	35-45	Min. 50



SQ84T

SQ84T SQUEALER

with Twin Gearboxes and 9-inch offset

The SQ84T comes in a 7-foot cutting width for tractors from 35 to 50 PTO horsepower. Reliable and durable, this model has everything that made Bush Hog famous.



296

290 SERIES Your BEST choice for medium duty cutting

- Cuts materials to 2"
- Extra deep 1/4" side bands
- Full length strongback
- EZ clean sloped 10 ga. decks
- 130 HP Bush Hog® gearbox
- Replaceable full length skids
- Slip clutch standard

	295	296	297
Cut Width	5'	6'	7'
Min. HP required	35 HP	45 HP	55 HP



326

320 SERIES Your BEST choice for heavy duty cutting

- Cuts materials to 3 1/2"
- Deep sidebands handle heavy volume
- Extra heavy duty hitch & tailwheel assembly and wheel bracket
- Fabricated 7 ga. decks
- 1/4" Sidebands
- Deck reinforcements
- Blade pans
- Cat. 5 driveline

	325	326	327
Cut Width	5'	6'	7'
Min. HP required	40 HP	50 HP	60 HP (lift) 40 HP (pull)



406

406 SERIES One of the toughest cutters on the market!

The 406 is a heavy-duty mower for brush cutting, land clearing, rights-of-way and highway maintenance. Minimum tractor HP - 60 PTO

- Cuts material up to 4"
- Heavy reinforced deck
- Made for heavy brush clearing
- Extra heavy blades
- Front safety chains standard
- Fabricated 1/4" thick deck
- 1/4" sidebands

- 3" x 1 1/2" x 1/4" channel strongbacks
- Heavy duty A-frame and tail wheel bracket
- Extra heavy duty blade pan
- Extra heavy duty Bush Hog blades
- Powder coat paint
- 6' cut width

**NEW****WEAVERLINE MULCHMASTER****Chop approximately 120 bales/hour!**

Made in USA



- Save up to 80% on mulching time over mulching by hand
- Mulch a bale of straw in as fast as 30 seconds
- With optional flexible hose kits mulch can be placed easily in tight spots around decks and shrubs
- Fits easily onto pickups, trucks or trailers
- Achieve an even, stable layer of mulch leaving work areas with a professional look

LAND PREPARATION

**BUSH HOG®**

Call for more information



2103

2100 Series Post Hole Diggers

Three models available.
Cat 1 or 2 mounting,
48" digging depth,
6"-24" augers.



Made in USA

**Worksaver®****Clear more brush!**

Worksaver Grapples designed for tractors that are equipped with a front loader.
2 sizes available.




Made in USA

NEW**SUNDOWN****REAR BLADES
RB-OT Series**

- Great for road grading, landscaping, snow removal, livestock pen cleaning, general maintenance and more.
- Offers offset and tilt adjustments
- 5' to 7' widths

**LANDSCAPE RAKES
YR-G Series**

- Engineered for versatility with 5 forward & 5 reverse angle settings
- Features a uniquely designed adjustable stabilizer tine bar that allows you to set the rigidity of the tines by lowering the stabilizer bar
- 5' to 8' widths

**HINGE BACK BOX BLADE
H-BB Series**

These Box Blades are heavy, yet economically priced. Designed for rugged use by homeowners, landscapers and farmers.

These Box Blades are great for landscaping, land leveling, back-filling, grading and many other applications.

- Rear cutting edge is hinged for deeper penetration and elimination of soil buildup between edges
- 5' to 8' widths



Made in USA

Maschio Rotary Tillers

The Maschio Rotary Tillers have provided a strong reliable tool for over 40 years to the agricultural market. Available in a wide variety of sizes. Contact us for details.

Other models available to 10' widths**W Series**

41"-52" width

Single speed, chain drive, adjustable offset mast

**H Series**

65"-81" width

Single speed, chain drive, fixed mast

**U Series**

63"-93" width

4 speed, gear drive, fixed mast

REARS PAK Fork

The "All-Around-Farm-Tool"

- Constructed from 2"x4" rectangular tubing
- 3 pt. hitch Cat. 1
- Transport fork
- Hooks up FAST
- 26" wide
- 44" load length
- Weight: 98 lbs.- truck freight
- 1000 lb. capacity



Made in USA

Use it to haul pallets of fencing, fence posts, hay and feed. Transport tote boxes of fruit and vegetables. Move irrigation pumps and small buildings. The list goes on and on ... that's why it's called the "All-Around-Farm-Tool"!

REA PAKFORK



Made in USA

- Expand machine usage
- No hardware or chains needed
- Adjustable tine spacing
- Attaches in seconds
- 7 sizes
- 2,500-22,000 lb. capacity

CTI produces forks which adapt to the loader bucket of a farm tractor, backhoe or industrial loader eliminating the need for a separate forklift. These forks are solid steel attached by welding brackets to the bucket top lip. A connecting bar holds the tines

and when the bucket is rolled back, the forks are attached. The tines adjust, no hardware or chains are necessary - and they attach in seconds! Call for more information. See price list for models.



WIFO offers 3 PT hitch and skid steer mounted forklifts with box rotators.

Models with lift heights of 7'10" and 9'2" and 4400 lb. capacity include Class II commercial carriage, box rotator with folding side tine, and 48" forged tines.



NEW

REARS

PAK-STAK

Hydraulic fork lift attachment. Available in 3 pt. hitch or subframe mount. 84" - 94" lift height. Fixed or hydraulic tilt. 2500# capacity.

REA PAK-STAK



Made in USA



Made in USA

CLAMP-ON BUCKET FORKS

Models BF-1000, BF-2000, BF-3000, BF-4000, and BF-6000



Available in 5 models from 1,000 to 6,000 lb. capacity. Mounts in seconds without tools, equipped with handles for easy mounting, adjustable handles and safety rated at twice the capacity.



NEW



TRASH FORKS TF Series

Trash Forks are a handy tool that will make moving tree branches and other debris an easy task. An investment in these new quick on and off **Clamp-On Trash Forks** will increase your front end loader's versatility. Available for 4' to 6' wide buckets.



3-point TRANS-PORTER

Cat. 1, 3 pt. hitch. Low cost carrying device designed to lift bulk bins, feed, baled hay - almost anything including other implements.



- Lifting height - up to 16"
- 46" solid steel forks
- Tilts 10° at maximum lift height

EDW TP6412 - 1500 lb. capacity

For more models and detailed information please contact us.



BLIZZARD

Agricultural Snowblowers

48"-94" width, for 15-75 HP tractors. Manual or hydraulic rotation.

Contact us
for details
and options



Crop Care™


Row Mulchers

By



Unsurpassed Mulching Versatility

The Crop Care™ Row Mulcher by Lanco lets you apply mulch in a wide range of applications. You can apply a pattern that is up to 48" wide and 1/2" deep, or 12" wide and 8" or more deep, depending on material conditions and travel speeds.

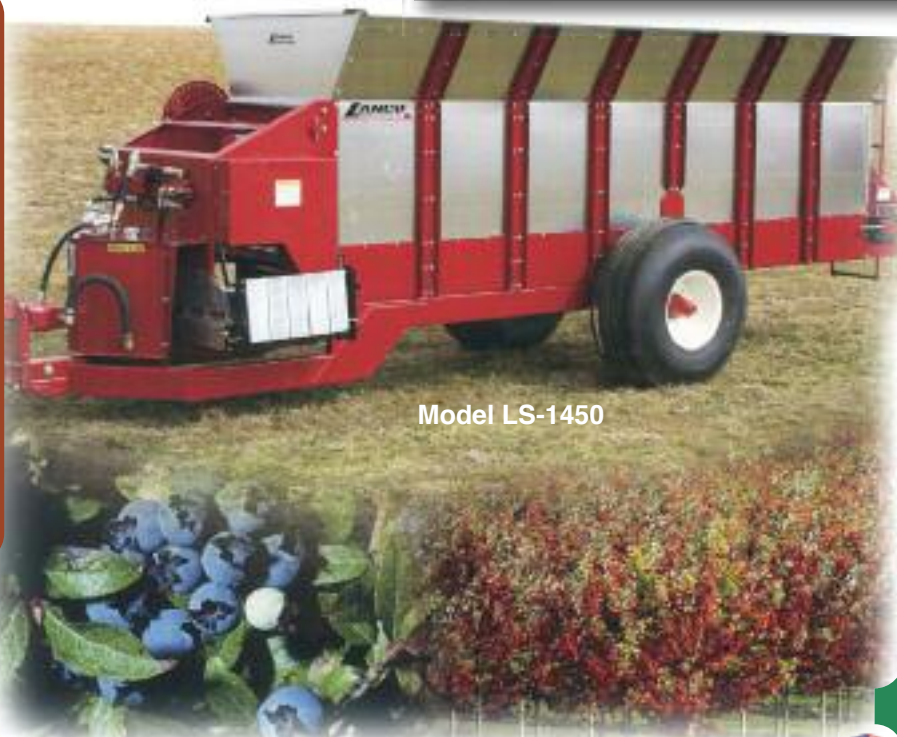

Model LS-1450

- 5.4 yards, heaped - 6000 lb. cap.
- 30 HP tractor required
- 96" Hopper length
- 36" Hopper width
- Fully adjustable tilting conveyor
- Dual directional delivery system
- Mulch from both sides
- Body: 12 gauge galvanized steel

Standard features:

- 2-way conveyor
- PTO Hydraulic drive
- Fine chain
- Manual endgate



Cross beam supports. Poly lumber deck has a 10 year warranty. Allows almost any kind of material.



Tilt control
Dual directional belt

Other models and capacities available



Made in USA

**RENTAL
AVAILABLE**

5-in-1 SUPER SPREADER

Other options available

INTERCHANGEABLE SPREADER ATTACHMENTS

The Lanco 5-in-1 Super Spreader is a state of the art spreading machine for spreading many kinds of material. The 5-in-1 features interchangeable spreader attachments, 2.4 yd. (65 ft.) capacity, drive via tractor Hyd (requires 8 GPM), net weight 2,300 lbs., maximum payload 8,300 lbs., W 67" x H 70", Length 157", Apron Chain with 3-1/2" slat opening spacing, rack and pinion end gate, and agricultural rib tire (11L x 15, 8 ply)



LCO BT01	Beater Attachment - For straw manure
LCO BR01	Brush Attachment - For top dressing turf (sand or mulch)
LCO CC01	Cross Conveyor (L or R) Crescent Belt - For row mulching
LCO CC30	Cross Conveyor Dual (L & R) w/2 CC20 Deflector Kit - Used for row mulching (L and R at the same time)
LCO DD01	Dual Disc Attachment - Used for fertilizers and compost



ACCURATE AND PRECISE

EUROPEAN MANUFACTURED VICON SPREADERS

Super Flow spreaders from Vicon fulfill all requirements for a long service life. The glass fiber reinforced polyester hopper and stainless steel meter disc is unaffected by aggressive types of fertilizer. The spreading unit and frame use the unique Duracoat Powder painting system for exceptional corrosion resistance. The bearings of the spreading unit have easily accessible grease fittings for maximum ease of maintenance.



The spreader is shipped with one standard broadcast spout. Many spout options are available for banding and narrow spread patterns. Call for options like covers, agitators, and hydraulic controls.

Specifications								
Model	203	303	403	503	604	754	804	954
Hopper lbs.	400	600	950	1200	1400	1650	1900	2100
Cu. Ft.	5.9	8.9	14.1	17.6	21.2	26.5	28.2	33.5
B.U.	4.7	7.1	11.2	14.0	16.9	21.2	22.5	26.8
Filling Height	30"	36"	35"	40"	38"	38"	42"	42"
Spreading Width	3'-46"	3'-46"	3'-46"	3'-46"	3'-46"	3'-60"	3'-60"	3'-60"
Machine lbs.	163	176	267	278	320	335	344	351



PENDULUM SPREADERS



Made in USA

- Category I, 3 PT Hitch, 540 RPM PTO
- Corrosion proof poly hopper
- Pendulum style spreading mechanism
- Precise spreading rate adjustment
- Spreading widths from 27' to 50' with standard spout
- Spreading rates from 20 to 900 lbs. per acre
- Optional spreading spouts for narrow widths or banding
- Capacities range from 900 - 2800 lbs.



LAND PREPARATION

sitrex SPREADERS

2 Pull Models available



FSP 100



FSP 150

Spreaders for green areas and garden use. The FSP series spreaders are designed to be used on small tractors, utility vehicles and ATV's without PTO shaft. These spreaders can be used for spreading fertilizers, sand or salt depending on the needs of the user.

Model	Hopper cap.	Max. load cap.	Width of spread pattern	Overall height	Hopper width
SIT FSP-100	26.5 gallons	264 lbs.	2.2-6.5 yards	40"	32"
SIT FSP-150	38 gallons	352 lbs.	2.2-6.5 yards	42"	36"



TrakMats™



Made in USA



**NO RUTS
NO DAMAGED LAWNS OR GROUNDS
NO WEATHER DELAYS
NO MORE DAMAGED PLYWOOD
3 Year Warranty!**

TrakMats is a 1/2" thick polyethylene mat made from 100% recycled material used to support heavy equipment on grounds or turf. Polyethylene is very flexible and will hold up to 60,000 pounds. **No more ruts, damaged lawn or weather delays!**

The mats are UV protected and not affected by hot or cold. The light colored mats stay cool and are manufactured in convenient sizes to fit the job. We recommend the width of the mat should be at least 1/3 wider than the widest tire on the vehicle. That gives the driver a mat size they can stay on so the load can be distributed to the ground. Hand cutouts are provided to assist lifting the mat.

TrakMats will not absorb water, will not dry rot and are not affected by oil, gas, or other chemicals. No more heavy, wet, rotten, broken, slippery plywood! Guaranteed against cracking and breaking for 3 years from date of purchase. To clean, simply wash with water.



**RENTAL
AVAILABLE**

**STRONG
FLEXIBLE
EASY-TO-USE**



**YOU NEED A MAT SYSTEM TOUGH
ENOUGH TO DO THE JOB ...**

LIGHT:

TRA TM2248 - 22 1/2" x 4' x 1/2" • 19 lbs.

TRA TM2272 - 22 1/4" x 6' x 1/2" • 29 lbs.

TRA TM2296 - 22 1/4" x 8' x 1/2" • 39 lbs.

TRA TM3696 - 36" x 8' x 1/2" • 64 lbs.

TRA TM4496 - 44 1/2" x 8' x 1/2" • 78 lbs.



BLACK (for use in mud conditions or where damage to lawns is not a concern):

TRA TM2248B - 22 1/2" x 4' x 1/2" • 19 lbs.


TRA TM2272B - 22 1/4" x 6' x 1/2" • 29 lbs.

TRA TM2296B - 22 1/4" x 8' x 1/2" • 39 lbs.

TRA TM3696B - 36" x 8' x 1/2" • 64 lbs.

TRA TM4496B - 44 1/2" x 8' x 1/2" • 78 lbs.

Use with all kinds
of vehicles
(no steel tracks)

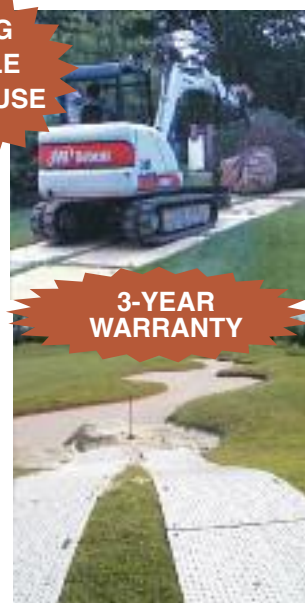

**3-YEAR
WARRANTY**



W.W. Manufacturing Company, Inc.

TRACKING WAGONS (TRAILERS)

Standard sizes available: 4'x8' (WWM 87), 5'x8' (WWM 90), 4'x10' (WWM 88), 5'x10' (WWM 91), 5'x12' (WWM 92) and 6'x12' (WWM 93) Other sizes special order. Freight only.



- Drawbar with Clevis hitch (folds for storage)
- Expanded metal deck
- Front axle parking brake applied when drawbar is raised/stored
- Heavy steel construction with angle iron
- Rear hitch for next wagon drawbar
- Both axles steer
- High speed wheels, bearings, hubs and axle pivot points.

To order: Call for quotation.
Options include multiple decks.

GO FOR CART

Large H.D. deck 27"x60", deck cover expanded metal, deck height 20", two swivel pneumatic wheels front, 2-16" fixed pneumatic wheels rear. Carrying capacity 600 lbs.

WWM 78



Made in USA

Tree/Ball Carts

Heavy duty welded steel tube standard with wide floatation tires, two sizes 24" and 36" ball size. Truck freight only.

24" ball 25" frame width, 29" overall 1" axle, 16x6.5x8 tires, 1000# cap.

WWM 224F

36" ball 30" frame width, 38" overall, 1" axle, 16x6.5x8 tires, 1000# cap.

WWM 230F



SERVICE CARTS (WAGONS)

Heavy duty carts for garden centers or nurseries. 600 lb. capacity. Pneumatic tires, expanded metal deck, 4" high railing. Two sizes.

WWM 81 - 28"x48" deck

WWM 82 - 24"x36" deck



BAR B7-BW

BAR B3-4C

Pack-It Tree/Goods Carrier

BAR B3-4C - 68" x 68", 2-4 person carrier • 6.25 lbs.

BAR B7-BW - 49", 2 person carrier • 2.8 lbs.





Pluk-O-Trak Machine



Increase picker's efficiency by 80-100%
Increase fruit quality by 15-20%
Eliminate ladders and picking buckets

OESCO, Inc. is proud to offer the Pluk-O-Trak fruit harvesting machine which can be used for harvesting, pruning and trellis work. This multi purpose machine, manufactured in the Netherlands by Munckhof, has been in use in orchards for over 30 years.

The harvester is self propelled, with one of the pickers controlling the driving speed. It is powered by a 13hp Honda gas engine in combination with a variable speed drive system and two speed gearbox. Speed can be varied from 0 to 2.5 mph. Engine is idling while in use. Extremely quiet and no mechanical vibration unlike hydraulically driven diesel powered units.

Two models are available:



Pluk-O-Trak Senior



Pluk-O-Trak Junior

Pluk-O-Trak Senior

- Max height of trees 12'-13'
- 12'-16' row spacing
- 2 hydraulically operated platforms on each side
- 6-8 pickers

Hydraulic platforms are adjustable in height and move in and out to allow pickers convenient access to all fruit.

Pluk-O-Trak Junior

- Max height of trees 11'
- 10'-14' row spacing
- 1 hydraulically operated platform on each side
- 4-6 pickers



Pickers remove the fruit from the tree and place it on a fingered conveyor belt specifically designed to carry it carefully to the ultra sensitive rotating bin filler with **no bruising**. Fruit quality is increased by 15-20% compared to conventional harvesting.



Empty bins are carried on the trailer, no need to set them out in advance. When bins are full, they are gently lowered down a ramp to the ground and a new bin is put in place from the trailer. The full bin passes underneath. This process takes about 45-60 seconds.



See the
Pluk-O-Trak
in action



FRUIT HARVESTING MACHINE

**Picking or Pruning ...
this is a very
versatile machine**



Take the conveyors off in about 15 minutes to utilize the Pluk-O-Trak for pruning. The **onboard compressor** allows for the use of pneumatic pruning tools. The four wheel drive makes use in snow possible.

Use for:

- Harvesting
- Dormant and Summer Pruning
- Hand Thinning
- Tying Tree Leaders
- Trellis Work
- Net Installation

Features include:

- Automatic hydraulic steering
- Leveling system: 2 or 4-way
- Two or four wheel drive
- Compressor for air pruning tools
- Pre-sort bin

